






Valve stem packing set - TA 200

Pre-compressed Packing set of specially impregnated PTFE fiber packing

Characteristics

Ring set made of pure PTFE packing fulfills with a tested leakage of 6.3×10^{-6} mbar · l/(s·m) the leakage criteria according to VDI 2440 +390 °F with a maximum allowable leakage rate of 1×10^{-4} mbar l/(sm) at 580 psi.

Operating range

			
p [psi]	360	3630	7250
v [fpm]	390	300	-
t °F	-330 ... +540		
pH	0 - 14		

Main application


- Valves
- Flaps
- Gate valves
- Fittings

Suitable for

- Chemical industry
- Petrochemical plants

Approvals

- TA Luft / VDI 2440 Certificate
- BAM 140 °F / 440 psi
- FDA
- EU 10/2011, EC 1935:2004

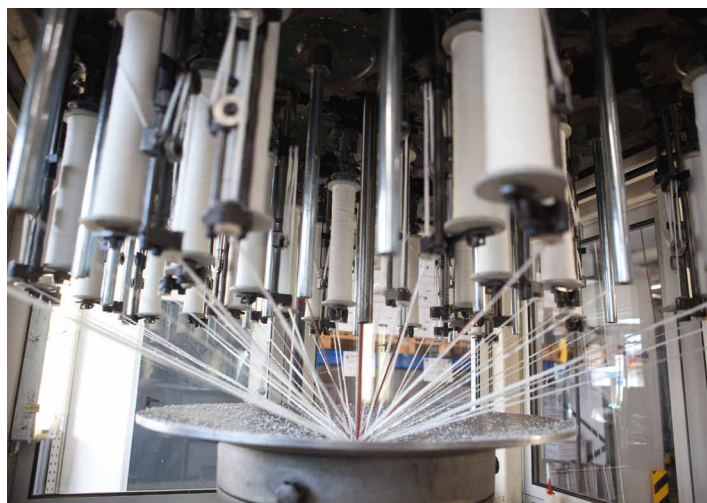

ProPack AG © 2021 | 01/21 | EN-03 | LN- Valve stem packing set - TA 200

All technical information and advice is based on our experience and will be given most conscientiously but without any liability.
Indication and figures are for guidance only and need to be examined by the user. All sizes are subject to manufacturing tolerances. We reserve the right to modify specifications at any time.
Please note that the technical values cannot be used all at the same time in their maximum values.

ProPack AG

Rudolf-Diesel-Ring 28 . 82054 Sauerlach . Germany

Phone ++49 (0) 8104 6640 0 . Fax ++49 (0) 8104 6640 44
propack@propack.ag

www.propack.ag
TECHNOLOGY MADE IN GERMANY