



Braided Flange Sealant

Rectangular braided tube packing

Characteristics

- The elasticity of this gasket tape allows low unevenness of the flange surface
- The sealant can be reused after opening of flange
- Sealing of the cutted ends by inserted point lock

Main application


- Metal, glass, ceramic flanges on
- boilers
- centrifuges
- pipe flanges
- tanklid
- housings

Suitable for

- Flanges in General service

Variant

SL 4, made of ePTFE graphite yarn
SL 6, made of oiled PTFE yarn
SL 19, made of PTFE yarn dry
SL 44 I, made of expanded graphite,
integrated Inconel reinforcement and
with adhesive backing

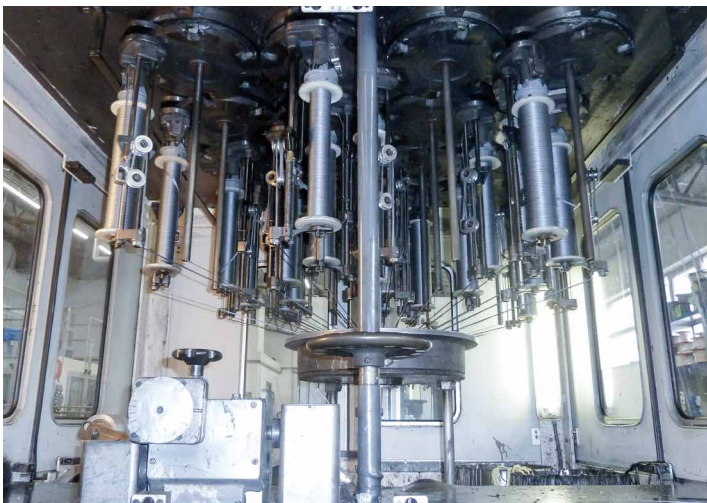

Form of delivery

15 x 5 mm / 9/16" x 3/16"
16 x 3 mm / 5/8" x 1/8"
20 x 4 mm / 3/4" x 1/6"
22 x 3 mm / 7/8" x 1/8"
25 x 6 mm / 1" x 1/4"
30 x 4 mm / 1 1/6" x 1/6"
33 x 5 mm / 1 1/3" x 3/16"
50 x 7 mm / 2" x 9/32"

Other dimensions and basic
materials – on request.

All technical information and advice is based on our experience and will be given most conscientiously but without any liability.
Indication and figures are for guidance only and need to be examined by the user. All sizes are subject to manufacturing tolerances. We reserve the right to modify specifications at any time.
Please note that the technical values cannot be used all at the same time in their maximum values.

ProPack AG

Rudolf-Diesel-Ring 28 . 82054 Sauerlach

Fon ++49 (0) 8104 6640 0 . Fax ++49 (0) 8104 6640 44
propack@propack.ag

www.propack.ag
TECHNOLOGY MADE IN GERMANY