



S 26 K Plunger white

Combination Braid Made of PTFE and Para-Aramid Fiber with Run In Lubricant

Characteristics

- Universal packing for abrasive media which need a reinforced, wear resistant and form stable packing
- Shaft protecting through good coefficient of friction
- No contamination of media

Operating range

			
p [bar]	25	500	250
v [m/s]	20	2	
t °C	-100 ... +280		
pH	2 - 12		
g/cm ³	1.45		

Practical useful application data:

max. temperature: +200 °C

max. pressure centrifugal pumps: 20 bar

max. velocity centrifugal pumps: 15 m/s

Main application

- Centrifugal pumps
- Mixer
- Kneader
- Agitators
- Filter
- Extruder
- Refiner


Suitable for

- Chemical industry
- Pulp and paper industry

Variant

S26 Kombi with Para-Aramid tread reinforcement

S36K Plunger with Meta-Aramid corner reinforcement

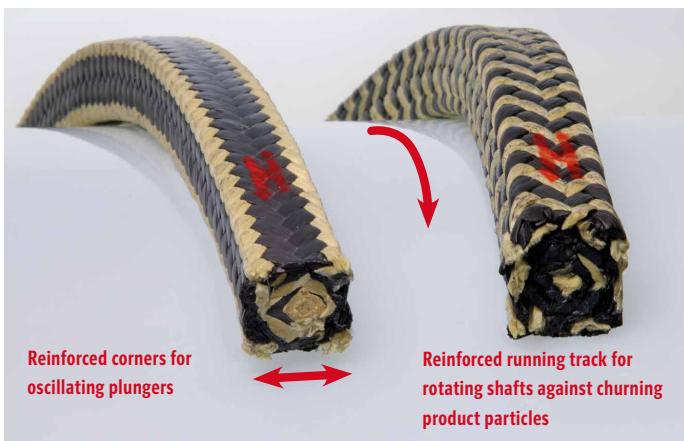

Form of delivery

This packing can be manufactured from 6 to 40 mm square as well as in intermediate, inch sizes and special measurements.

06 - 09 mm on 1 kg spool

10 - 15 mm on 2,5 kg spool

16 mm and above on 5 kg spool

Special length, pre-cut or die formed rings on request.

1 kg of packing of the following cross-sections is equivalent to displayed meter lengths:

Size mm	Meter	Size mm	Meter
6	19.2	14 [9/16"]	3.5
6.35 [1/4"]	17.1	15	3.1
7	14.1	16 [5/8"]	2.7
8 [5/16"]	10.8	18	2.1
9.5 [3/8"]	7.6	19 [3/4"]	1.9
10	6.9	20	1.7
11 [7/16"]	5.7	22 [7/8"]	1.4
12	4.8	25 [1"]	1.1
12.7 [1/2"]	4.3		

